



GENERAL DATA

Application:	M/HBP
Refrigerant:	R404A
Expansion Device:	C-V
Weight:	82 kg
Receiver:	2.3 liter
Voltage/Frequency:	230 V 50 ~
Height:	82 mm
Length:	551 mm
Width:	1093 mm
Institute Approvals:	CE


EXTERNAL DIMENSIONS

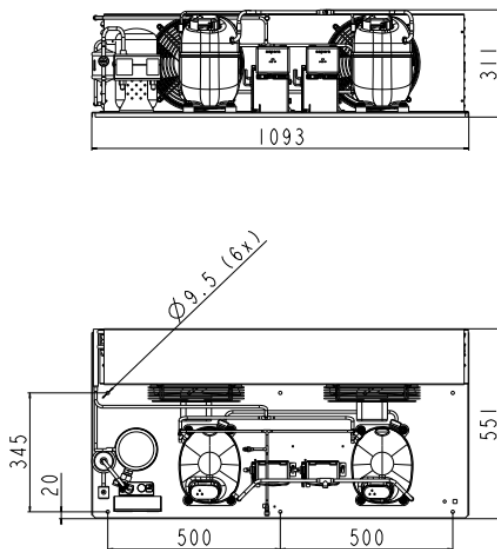

WIRING DIAGRAM

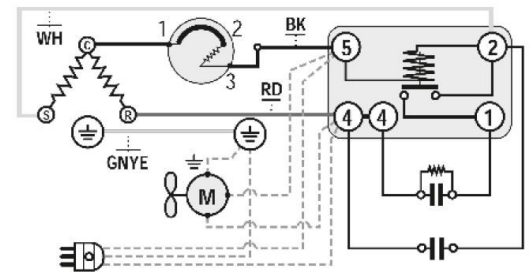

OPERATING ENVELOPE

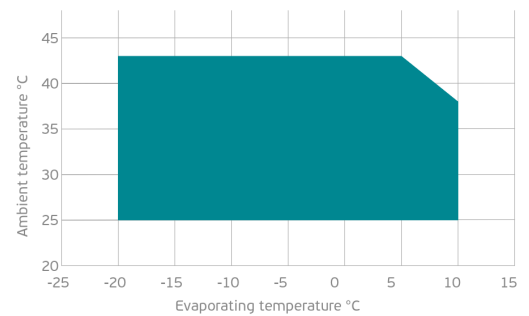

COMPONENTS (SPARE PARTS)

valve_disch:	SOLDER 3/8"	2110049
sightglass:	SIGHT GLASS 10MM ODF	2464040
condenser:	4R11T	2451185
elkit:	ELKOM NJ9226GK	944LV1104A

dryer:	FILTER DRYER 10MM ODF	2730010
dualpressostat:	PS2 - A7K	2466035
fankit:	S2E250-AL06-73	1996411
compressor:	NJ9226GK	944LV95..AC

For additional accessories please contact our technical support

ELECTRICAL DATA

Motor Type: CSR -
Locked Rotor Amperage (LRA): 55 A
Max.Current: 12.62 A

At maximum evaporating temperature and maximum ambient temperature.

FAN MOTOR

Number: 2 -
Shaft Power: 2 W
Air Flow: 3008 m³/h
Blade Diameter: - mm

PERFORMANCE CURVE DATA

Standard: EN13215-RG20 / return gas 20°C, subcooling 3K

50 Hz

	Evaporating Temperature (°C)	Cooling Capacity (W)	Power Consumption (W)	Current Consumption (A)	Efficiency (W/W)
25 °C Ambient Temperature	10°C	6 855	2 914	13.04	2.35
	5°C	5 971	2 716	12.28	2.20
	0°C	5 209	2 501	11.37	2.08
	-5°C	4 526	2 282	10.40	1.98
	Rated point -10°C	3 876	2 071	9.46	1.87
	-15°C	3 214	1 879	8.62	1.71
	-20°C	2 496	1 719	7.96	1.45
32 °C Ambient Temperature	10°C	6 243	3 003	13.43	2.08
	5°C	5 420	2 799	12.65	1.94
	0°C	4 721	2 579	11.73	1.83
	-5°C	4 102	2 354	10.74	1.74
	Rated point -10°C	3 518	2 136	9.76	1.65
	-15°C	2 925	1 938	8.89	1.51
	-20°C	2 277	1 772	8.20	1.29
43 °C Ambient Temperature	5°C	4 652	2 960	13.35	1.57
	0°C	4 031	2 730	12.40	1.48
	-5°C	3 493	2 494	11.37	1.40
	Rated point -10°C	2 993	2 266	10.36	1.32
	-15°C	2 487	2 056	9.44	1.21
	-20°C	1 929	1 878	8.69	1.03