

Danfoss

Thermostatische Expansionsventile T2/TE2


(Bördelversion)

Danfoss

Thermostatische Expansionsventile Baureihen T2 und TE2: TX2, TEX2, TZ2, TEZ2, TN2, TEN2, TS2, TES2, TE2, T2

Hersteller-Nr.	Typ	Kältemittel	Bereich	MOP (°C)	Druckausgl. Bördel	Bördelanschl. (mm)
068Z3206	TX 2	R22, R407C	N	-	-	10 x 12
068Z3208			N	15	-	10 x 12
068Z3224			NM	0	-	10 x 12
068Z3226			NL	-10	-	10 x 12
068Z3228			B	-20	-	10 x 12
068Z3209	TEX 2		N	-	1/4"	10 x 12
068Z3211			N	15	1/4"	10 x 12
068Z3225			NM	0	1/4"	10 x 12
068Z3227			NL	-10	1/4"	10 x 12
068Z3210			B	-	1/4"	10 x 12
068Z3229			B	-20	1/4"	10 x 12
068Z3496	TZ 2	R407C	N	-	-	10 x 12
068Z3516			N	-15	-	10 x 12
068Z3501	TEZ 2		N	-	1/4"	10 x 12
068Z3517			N	-15	1/4"	10 x 12
068Z3346	TN 2	R134a	N	-	-	10 x 12
068Z3347			N	15	-	10 x 12
068Z3393			NM	0	-	10 x 12
068Z3369			NL	-10	-	10 x 12
068Z3348	TEN 2		N	-	1/4"	10 x 12
068Z3349			N	15	1/4"	10 x 12
068Z3392			NM	0	1/4"	10 x 12
068Z3370			NL	-10	1/4"	10 x 12
068Z3400	TS 2	R404A, R507	N	-	-	10 x 12
068Z3402			N	15	-	10 x 12
068Z3406			NM	0	-	10 x 12
068Z3408			NL	-10	-	10 x 12
068Z3401			B	-	-	10 x 12
068Z3410			B	-20	-	10 x 12
068Z3403	TES 2		N	-	1/4"	10 x 12
068Z3405			N	15	1/4"	10 x 12
068Z3407			NM	0	1/4"	10 x 12
068Z3409			NL	-10	1/4"	10 x 12
068Z3404			B	-	1/4"	10 x 12
068Z3411			B	-20	1/4"	10 x 12
068Z3715	T2	R407F, R407A	N	-	-	10 x 12
068Z3714	TE2		N	-	1/4"	10 x 12

Aufbau der Typennummer:

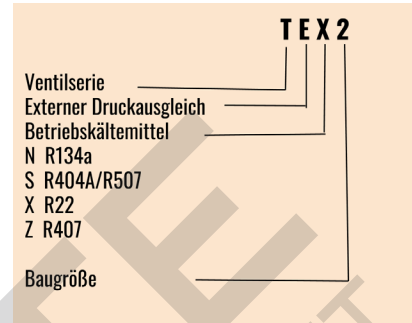

*Kapillarrohr: 1,5 m

Bereiche:

N = -40 °C bis 10 °C

B = -60 °C bis -25 °C

NM = -40 °C bis -5 °C, MOP 0 °C

NL = -40 °C bis -15 °C, MOP -10 °C

T2/TE2 Düsen für Bördelversion:

T2 / TE2	Größe	Nennleistung in kW				
		R134a	R22	R404A	R407C	R507
068-2002	0X	0,68	0,90	0,64	0,92	0,64
068-2003	00	1,20	1,80	1,30	1,80	1,30
068-2010	01	2,10	3,50	2,60	3,50	2,60
068-2015	02	2,60	4,70	3,70	4,80	3,70
068-2006	03	4,30	8,00	6,30	8,10	6,30
068-2007	04	6,40	12,10	9,90	12,40	9,90
068-2008	05	8,40	16,70	13,00	16,50	13,00
068-2009	06	10,10	19,70	15,50	19,70	15,50

